


INTERNATIONAL SOCIETY FOR SOIL MECHANICS AND GEOTECHNICAL ENGINEERING

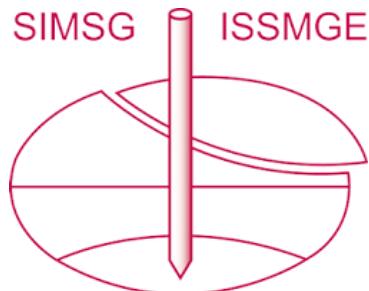

This paper was downloaded from the Online Library of the International Society for Soil Mechanics and Geotechnical Engineering (ISSMGE). The library is available here:

<https://www.issmge.org/publications/online-library>

This is an open-access database that archives thousands of papers published under the Auspices of the ISSMGE and maintained by the Innovation and Development Committee of ISSMGE.

New developments in field and laboratory testing of soils: Errata

Nouveaux développements des essais in-situ et de laboratoire: Errata

M.JAMIOLKOWSKI, Technical University of Turin, Italy

C.C.LADD, Massachusetts Institute of Technology, Cambridge, Mass., USA

J.T.GERMAINE, Massachusetts Institute of Technology, Cambridge, Mass., USA

R.LANCELLOTTA, Technical University of Turin, Italy

SECTION	PAGE	LINE	FIGURE	TABLE	ERRATA	CORRIGE
2.2.2	8, right	62	-	-	no reference given for Peck (1974)	(1)
2.2.2	9	-	2	-	no reference given for Lefebvre et al. (1983)	(2)
2.2.2	10	-	-	V-B	... and deposits	... land deposits
2.2.3	10, right	21	-	-	no reference given for O'Neill et al. (1985)	(3)
2.2.3	11, right	25	-	-	$q = \sigma'_p$	$q = p'$
2.2.3	11	-	3-b	-	$0.5 \cdot (\sigma'_v + \sigma'_h)$	$0.5 (\sigma'_v - \sigma'_h)$
2.2.3	12	-	4	-	no reference given for Lefebvre et al. (1983)	(2)
2.2.3	13	-	7	-	no reference given for Lefebvre et al. (1983)	(2)
2.2.4	13	-	6-a	-	τ_{\max}	$\tau_h \max$
2.2.5	15, left	42	-	-	Some evidence that ...	Some evidence exists to indicate that ...
2.3.2	17	-	9-a	-	$\sigma'_{vo} = 2.3$	$\sigma'_{vo} = 230$
2.3.2	17	-	9-b	-	$\sigma'_{vo} = 0.65$	$\sigma'_{vo} = 65$
2.3.2	18	-	10-F1	-	55 ± 75	55 ± 7.5
2.3.2	18	-	10	-	Ladd et al. (1981)	Ladd et al. (1980)
2.3.3	20	-	12	-	$W_N = 51\%$	$W_N = 57\%$
2.3.3	20	-	12	-	kPa, kPa	kPa
2.4.2	22, right	2	-	-	modulus at yield	yielded modulus
2.4.2	23	-	-	table	0.252	0.256
2.4.3	25	-	16	-	$\sigma_1 = \sigma_3$	$\sigma_1 = \sigma_z$
2.4.3	25, left	24	-	-	$\sigma_a \neq \sigma_v$	$\sigma_a \neq \sigma_b$
2.4.3	26	-	18	-	Height et al. (1983)	Height et al. (1983)
2.4.3	26, right	10	-	-	versus δ angle of the four ...	versus δ angle for one of the ...
2.4.3	26, right	18	-	-	Should be added:	Variability due to the device and/or shear testing techniques
2.4.3	27	-	20-a	-	$\sigma'_{oct} = 600$ kPa	$\sigma'_{oct} = 600$ kPa
2.4.3	27	52	-	-	σ_o	σ_{oct}
2.5.2	30	-	22-b	-	Δe^t	Δe^t
2.5.2	31, right	17	-	-	$2 \cdot C_c/C_k$	C_c/C_k
2.5.2	31, right	17	-	-	K_o	k_o
2.5.2	32	-	24-b title	-	... and predicted and predicted ...
2.5.2	32	-	25	-	C_d/CR	C_a/CR
3.2.4	45	-	45	-	Rod Weight	Rod Weight
3.2.4	46	-	46-axis	-	σ'_{ho}	σ_{ho}

(1) Peck R.B. (1974). The Selection of Soil Parameters for the Design of Foundations. Second Nabor Carrillo Lecture, Guadalajara, Mexico.

(2) Lefebvre G., Ladd C.C., Mesri G. and Tavenas F. (1983). Report on the Subcommittee on Test NG of the Committee of Specialists on Sensitive Clays on the NBR Complex, Sebj, Montreal, Annexe I.

(3) O'Neill D., Ladd C.C. and Germaine J.T. (1985). Thixotropic Hardening of an Overconsolidated Clay, in Preparation for Submittal to ASCE, JGED.

SECTION	PAGE	LINE	FIGURE	TABLE	ERRATA	CORRIGE
3.2.4	48	-	50-title		Triaxial Compression Tests $K_p < 1$	Triaxial Tests $K_o < 1$
3.2.6	50, right	41	-	-	$E_{ur}/q_c = 13.6 \pm 2.2$	$E_{ur}/q_c = 9.9 \pm 2.2$
3.3.3	63, right	20	-	-	the product of RM . E_D	the product of RM x E_D
3.3.3	64, right	41	-	-	E_D values	44.5 ± 15.4 etc...
3.3.3	65	-	-	XIII		
3.4.5	72	-	-	XV	Porto Tolle PI = 31 ± 2	Porto Tolle PI = 31 ± 12
3.4.5	73	-	76	-	$\Delta u/\Delta u_i$	$\Delta u(t) / \Delta u_o$
3.4.5	74, right	46	-	-	$\Delta \sigma_{vo}$	$\Delta \sigma_v$
3.4.6	75, right	15	-	-	enhance	endancer
3.4.6	77, left	22	-	-	which	wick
4.1	83	-	85	-	strip chart recorded	strip chart recorder
4.6	85	-	87	-	"ZERO" LOG TIME	"ZERO" LAG TIME
Refer-					Ladd C.C., Foott R. (1960)	Ladd C.C., Foott R. (1980)
ences	93, right	43	-	-		