

# Prediction of water content under climatic actions. A method based on spectral analysis and soil transfer functions

## Prédiction de la teneur en eau sous actions climatiques. Une méthode basée sur l'analyse spectrale et les fonctions de transfert du sol

Y.F. Vargas-Alzate\*, J. Vaunat, A.M. Zapata-Franco

*Universitat Politècnica de Catalunya, BarcelonaTech (UPC)/International Centre for Numerical Methods in Engineering (CIMNE), Barcelona, Spain*

A. Di Mariano

*International Centre for Numerical Methods in Engineering (CIMNE)/Universitat Politècnica de Catalunya · BarcelonaTech (UPC), Barcelona, Spain*

\*[yeudy.felipe.vargas@upc.edu](mailto:yeudy.felipe.vargas@upc.edu)

**ABSTRACT:** Changes in water content and suction under climatic actions is one important process in several geotechnical issues, such as earth-structures deformation, foundation heave/settlement or slope failures seated in the vadose zone. In addition, under certain conditions, these changes may act as a forcing condition for the underlying saturated water column and control cyclic pore pressure changes at higher depths. The deterministic modelling of these effects requires considering soil-atmosphere thermo-hydro-mechanical interactions under long time high-frequency series. Associated computational cost appears quickly to be a limitation to this type of simulations, particularly when going to large geometry or regional analyses. This article shows two strategies to estimate the soil hydraulic response in time under climatic series handled by Fourier decomposition. These strategies present similarities with techniques used to analyse soil response under seismic actions and propose to define soil transfer functions relating the input (climatic time series) to the output (water content or suction/pore pressure variation at several depths).

**RÉSUMÉ:** Les changements dans la teneur en eau et la succion sous les actions climatiques sont un processus important dans plusieurs problèmes géotechniques, tels que la déformation des structures en terre, le soulèvement/affaissement des fondations ou les ruptures de pente situées dans la zone vadose. De plus, dans certaines conditions, ces changements peuvent agir comme une condition de forçage pour la colonne d'eau saturée sous-jacente et contrôler les changements cycliques de pression interstitielle à des profondeurs plus élevées. La modélisation déterministe de ces effets nécessite de considérer les interactions thermo-hydro-mécaniques sol-atmosphère dans des séries longues et hautes fréquences. Le coût de calcul associé apparaît rapidement comme une limitation à ce type de simulations, notamment lorsqu'il s'agit de grandes géométries ou d'analyses régionales. Cet article présente deux stratégies pour estimer la réponse hydraulique du sol dans le temps sous des séries climatiques traitées par décomposition de Fourier. Ces stratégies présentent des similitudes avec les techniques utilisées pour analyser la réponse des sols sous actions sismiques et proposent de définir des fonctions de transfert du sol reliant l'entrée (séries temporelles climatiques) à la sortie (teneur en eau ou variation de succion/pression interstitielle à plusieurs profondeurs).

**Keywords:** Water content, Fourier Transformation, Climatic variables, Soil properties.

## 1 INTRODUCTION

Expected scenarios of climate change point to a modification of the Intensity-Duration-Frequency curves (IDR) of precipitations, in which long periods of dryness will be suddenly interrupted by very intensive rainfalls (Heidari et al. 2020). This extreme phenomenon would rapidly increase the water content within a dry soil mass, leading to major failure probabilities. Modification of IDR may also play a significant role in earthquake-induced soil phenomena such as liquefaction and seismic slope stability

(Keefer, 2002; Roback et al., 2018). Accounting for such effects requires estimation of water pressures or water contents within soil masses, under the whole climatic histogram.

Variations of pore pressures or water contents are governed by the mass balance of water, which results mathematically in a convection-diffusion equation. Under climatic actions, it is moreover coupled with the heat equation to model water phase changes and evaporation. These equations describe various diffusion processes of water, vapour and heat in porous

media (Stepniewski et al. 2011), which translate into an attenuation and shift of phase at the depth of surface fluctuations. Under simplifying assumptions, they can be reduced to a system of two diffusion equations that can be solved using classical techniques, avoiding direct-integration schemes (Canuto et al., 2007). For instance, spectral methods by mode decomposition, potentially involving the use of the Fast Fourier Transform (FFT, Cooley and Tukey, 1965). These techniques can be used to reduce the order of the problem by assessing, in the frequency domain, problems unmanageable within the limit of the current computational capacity (long time-periods – predictions under climate change – and large areas – city, hydrological basins). They also present the advantage of handling input defined as a frequency spectrum, avoiding working with time series of climate change scenarios.

Reduction of the computational cost by suppression of the time dimension allows to develop a computational framework to estimate the probability of occurrence of water pressure/water content above thresholds related to soil failure, for a prescribed spectrum of climatic variables. Moreover, computational effort reduction allows considering uncertainties involved, for instance, in the soil mechanical properties, acting loads, climate-related variables, etc.

This article examines two approaches to develop reduced order models capable to predict the evolution of water content in soils, denoted as  $\theta$ , with time. The first approach is based on the development of transfer functions between climatic variables and  $\theta$ . These functions are obtained as the ratio between the Fourier amplitude spectra of both  $\theta$  and the climatic variables. The second approach has been oriented to study the capabilities to predict  $\theta$  by means of a parametric transfer function. The latter has been developed by considering specific boundary conditions in terms of flux.

## 2 CLIMATIC VARIABLES AND WATER CONTENT IN THE SOIL

Records of a monitoring campaign carried out in an upper horizontal soil layer during seven years (max. depth 1 m, Calvet et al., 1999) have been analysed. They contain the time-history evolution of the soil water content at several depths. In addition, a series of climatic variables of the area have also been recorded.

### 2.1 Water content in the soil

Figure 1 shows the time evolution of  $\theta$  with depth, in the analysed soil profile. Specifically,  $\theta$  has been

recorded at ten depths, the shallowest being at 5 cm from the surface whilst the deepest is at 95 cm.

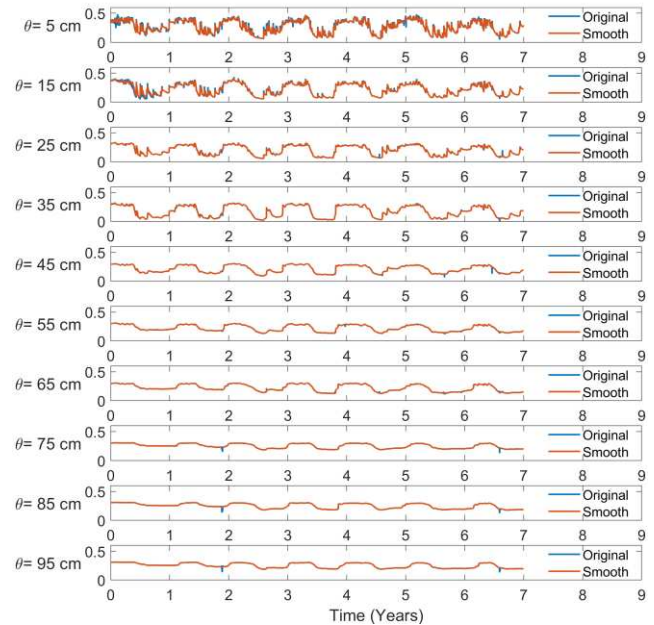


Figure 1. Water content in soils.

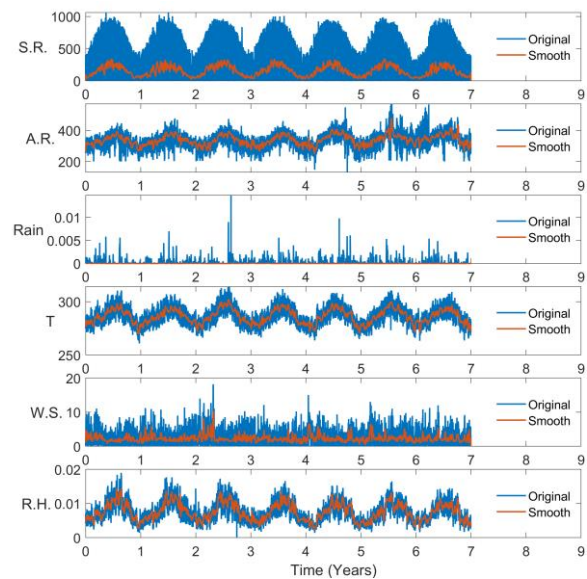


Figure 2. Climatic variables.

Due to some problems with the recording devices, some gaps in the data have been observed. They have been interpolated using a smooth function around a given data gap.

### 2.2 Climatic variables

Data on solar and atmospheric radiation (S.R. and A.R., respectively), rainfall intensity, temperature (T), wind speed (W.S.) and relative humidity (R.H.) have been collected in the aforementioned campaign (Climate-related variables); Figure 2 shows the time-history evolution of them. This figure also shows data

smoothing to analyse how the mean evolves over time. Data smoothing has not been applied to the time-history climate data.

### 3 TRANSFER FUNCTION ANALYSIS

The previous records can be seen as input (Climatic variables) and output variables (water contents at depth), namely I/O variables. Based on this perspective, these records have been used to develop TFs capable of making forecasts considering climatic variables as input. These transfer functions have been obtained as ratios between the Fourier's transform of the recorded I/O variables. Specifically, this approach seeks to characterize  $\theta$  from a transfer function,  $TF$ . This function is obtained by considering the Fast Fourier transform (FFT) of  $\theta$  and the Fast Fourier transform of a single climatic variable. The following equation shows the mathematical form that characterizes a  $TF$ :

$$TF_{i,j}(\omega) = \frac{f_{i,j}(\omega)}{g_j(\omega)} \quad (1)$$

where  $f_{i,j}(\omega)$  is the Fourier amplitude spectrum of  $\theta_i$ ;  $g_j(\omega)$  is the Fourier amplitude spectrum of the climatic variable  $g$ ; subscripts  $i$  and  $j$  stand for a specific depth and a given climatic variable, respectively. The main hypothesis is that, given the time history of  $\theta$  and a specific climatic variable,  $g_j$ , the  $TF$  obtained through Equation (1) can be used to approximate the Fast Fourier Transform of the Soil Response Parameter (SPR) to another record,  $g_k$ :

$$f_{i,k}(\omega) \approx TF_{i,j}(\omega) * g_k(\omega) \quad (2)$$

To validate this approach, the recorded data have been divided into two subsets:  $(f_{i,j}, g_j)$  and  $(f_{i,k}, g_k)$ . The first one is used to develop the  $TF$ s whilst the second to evaluate the consistency of the results. It is worth mentioning that both subsets have data for 3 years. The seventh year has not been considered in the analysis to ensure balance between learning and validation time periods while maintaining signal stationarity.

The efficiency of a variable to predict the dynamic response of a system, using a transfer function, depends on the correlation between both (the variable and the response of the system). Therefore, at a first stage, the causality between I/O variables was evaluated. Specifically, a series of correlation analyses were performed to identify the variables that most influence the prediction of  $\theta$  (Wagener and Pianosi, 2019). First, the bivariate distribution between pairs of

I/O variables was studied. The efficiency (predictive capacity) of the input variables was measured in terms of the coefficient of determination,  $R^2$ . As a product of this analysis, a ranking based on the efficiency of the input variables was performed. Table 1 presents the  $R^2$  values between I/O variables. The data show that T and R.H. have a strong correlation with  $\theta$ , which emphasizes the main role of evaporation in water content changes at that site.

Table 1.  $R^2$  between climatic variables and water content.

Z (cm)	S.R.	A.R.	Rain	T	W.S.	R.H.
5	-0.18	-0.44	0.07	-0.58	0.07	-0.55
15	-0.15	-0.45	0.05	-0.55	0.11	-0.54
25	-0.14	-0.45	0.04	-0.55	0.10	-0.55
35	-0.12	-0.45	0.03	-0.53	0.11	-0.55
45	-0.11	-0.44	0.03	-0.51	0.11	-0.53
55	-0.07	-0.39	0.02	-0.43	0.11	-0.44
65	-0.04	-0.36	0.03	-0.37	0.11	-0.37
75	0.02	-0.27	0.02	-0.25	0.11	-0.25
85	0.01	-0.29	0.02	-0.27	0.09	-0.26
95	0.04	-0.23	0.02	-0.18	0.11	-0.18
<b>Mean</b>	<b>-0.07</b>	<b>-0.38</b>	<b>0.03</b>	<b>-0.42</b>	<b>0.10</b>	<b>-0.42</b>

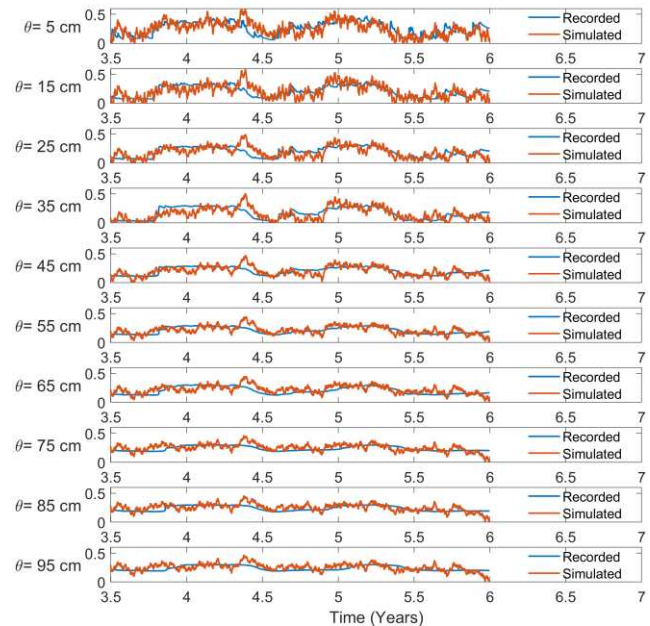


Figure 3. SRP's prediction by using TFs.

Based on the results presented in Table 1 and employing the first approach, a prediction of  $\theta$  was performed and T was used to develop the transfer functions. Figure 3 shows the obtained results. There is good agreement between predicted and recorded data in terms of maximum values for all the analysed depths. Simulated data of  $\theta$  show high frequency fluctuations which are not observed in recorded data.

#### 4 PARAMETRIC TRANSFER FUNCTION

Another approach to predict  $\theta$  by means of spectral methods is to develop a parametric transfer function. To do so, special boundary conditions need to be considered. In this case, the flux ( $\frac{d\theta}{dt}$ ) at a given depth,  $L'_z$ , was set at zero and the  $\theta$  value recorded at a depth of 5 cm was imposed at the surface (See Figure 1, top). In this manner, the analytical solution of the diffusion equation provides the expression of  $\theta$  at depth  $z$ :

$$\theta = \bar{\theta} + \sum_{i=1}^n \delta_i A_i \sin(\omega_i t + \alpha_i * (z - L'_z) + \varphi_i + \frac{\pi}{2}) \quad (3)$$

where  $\delta_i = \frac{e^{\alpha_i z} - e^{-\alpha_i z}}{e^{\alpha_i L'_z} - e^{-\alpha_i L'_z}}$ ;  $\alpha_i = \sqrt{\frac{\omega_i}{2\kappa}}$ ;  $\kappa$  is the diffusion coefficient, in a mathematical sense;  $A_i$  and  $\varphi_i$  are the amplitude and the phase of the harmonic with frequency  $\omega_i$ , extracted from the Fourier's amplitude spectrum, respectively;  $\bar{\theta}$  is the mean of the water content during the period taken into account.

Equation (3) has allowed estimating, at all the depths, the pair  $(\kappa, L'_z)$  that minimizes the mean square error (MSE) with respect to the recorded data. This was achieved by means of the Monte Carlo method. It is worth mentioning that the estimation provided by Equation 3 depends on the number of harmonics. Thus, the Monte Carlo minimization was performed using 100 harmonics. Figure 4 shows the evolution of the MSE as a function of  $\kappa$  and  $L'_z$ .

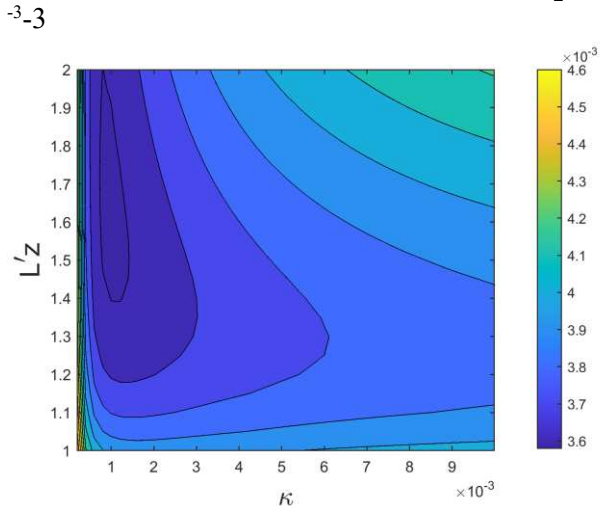


Figure 4. MSE as a function of  $\kappa$  and  $L'_z$ .

From Figure 4, it can be inferred that the optimal pair  $(\kappa, L'_z)$  is  $\kappa=0.001$  and  $L'_z=1.6$  m. By using these values,  $\theta$  has been estimated for all depths; Figure 5 shows a comparison of both simulated and recorded data, using 100 harmonics in Equation 3. Simulated

and recorded data are in good agreement for all depths. Simulated results do reproduce well both the attenuation with depth of the water change amplitudes and the disappearance of the higher frequency modes. This is consistent with the characteristics of the diffusion equation underlying the infiltration/evaporation process and indicates that the sensitivity of water content changes to atmospheric fluctuations decays with depth.

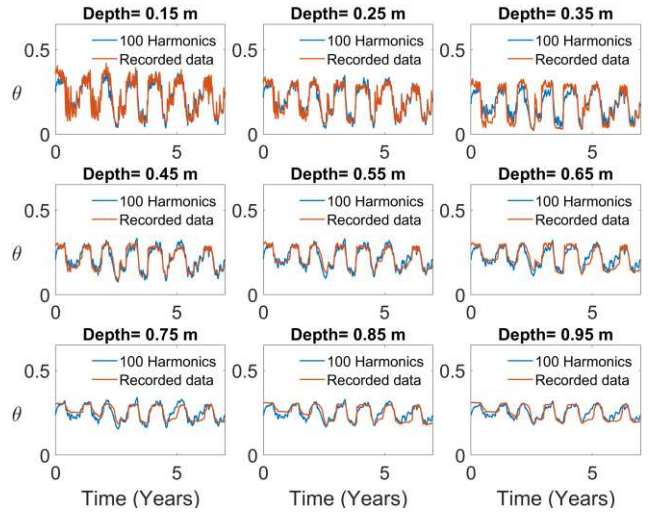


Figure 5.  $\theta$  prediction considering 100 harmonics.

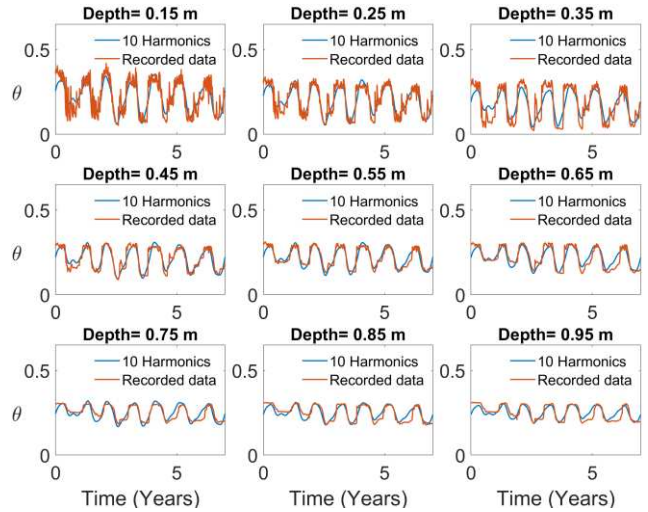


Figure 6.  $\theta$  prediction considering 10 harmonics.

To study possible reduction of the computational cost, another analysis was conducted using the same pair  $(\kappa, L'_z)$  that minimizes the MSE and considering only the 10 harmonics (Figure 6) provided with the higher amplitudes. The agreement between simulated and recorded data is similar to the one observed for the analysis with 100 harmonics. This provides information about the most relevant modes to be used in future predictions of water content under climatic actions, at this site. The number of harmonics to be used decreases with depth as the result of the

attenuation of the fluctuations of higher frequencies with the distance to atmospheric boundary conditions.

## 5 CONCLUSIONS

This article presents two approaches based on spectral methods, for estimating soil water contents at different depths. The attractiveness of both methods relies mostly on the reduction of computational times. Data from a monitoring campaign carried out in an upper horizontal soil layer (max. depth 1 m, Calvet et al., 1999) were considered. These records implicitly contain information on the interaction of complex physical processes that trigger highly random variability. They provide an opportunity to conduct causality studies aimed at analysing which climate variables (input) have the highest explanatory capacity to predict soil water content,  $\theta$  (output variable).

In the first approach, transfer functions connecting variables that influence climate (Solar and atmospheric radiation, rainfall intensity, temperature, wind speed, atmospheric pressure and relative humidity) and  $\theta$  at several depths were operated. Data show that temperature and relative humidity are the atmospheric variables with the highest predictive capacity of  $\theta$ . The correlation between these climatic variables and  $\theta$  can increase if a multi-regression model composed of sub-groups of climatic variables is employed (See Vargas-Alzate et al., 2022). One of the main shortcomings of the first approach is that simulated data tend to fluctuate more than recorded series, over short time periods. However, these fluctuations can be mitigated if filters that act on the resulting signals are considered. Future research should be conducted to this end.

With regard to the second approach, a deterministic transfer function was employed, based on specific boundary conditions. Predictions based on this method are better than those based on the first approach, provided that parameters are previously estimated by back-analysis on sub-sets of data series. As depth increases, it is possible to consider fewer harmonics than close to the soil surface. Estimating the optimal number of harmonics as a function of depth would help improving the model efficiency. The use of a specific parameter that varies with depth would help addressing the intrinsic non-linearity of the diffusion coefficient.


## ACKNOWLEDGEMENTS

This research has been funded by the Spanish Research Agency (AEI) through the project with reference: TED2021-132559B-I00 – J-02970.

## REFERENCES

- Calvet J.-C., P. Bessemoulin, J. Noilhan, C. Berne, I. Braud, D. Courault, N. Fritz, E. Gonzalez-Sosa, J.-P. Goutorbe, R. Haverkamp, G. Jaubert, L. Kergoat, G. Lachaud, J.P. Laurent, P. Mordelet, A. Olioso, P. Péris, J.L. Roujean, J.-I. Thony, C. Tosca, M. Vauclin and D. Vignes, 1999: Murex: a land surface field experiment to study the annual cycle of the energy and water budgets. *Ann. Geophys.*, 17, 838-854. <https://doi.org/10.1007/s00585-999-0838-2>.
- Canuto, C., Hussaini, M. Y., Quarteroni, A., and Zang, T. A. (2007). *Spectral methods: evolution to complex geometries and applications to fluid dynamics*. Springer Science & Business Media.
- Cooley, J. W., and Tukey, J. W. (1965). An algorithm for the machine calculation of complex Fourier series. *Mathematics of computation*, 19(90), 297-301.
- Heidari, H., Arabi, M., Ghanbari, M., and Warziniack, T. (2020). A probabilistic approach for characterization of sub-annual socioeconomic drought intensity-duration-frequency (IDF) relationships in a changing environment. *Water*, 12(6), 1522. <https://doi.org/10.1023/A:1021274710840>.
- Keefer, D. K. (2002). Investigating landslides caused by earthquakes—a historical review. *Surveys in Geophysics*, 23(6), 473-510. <https://doi.org/10.1023/A:1021274710840>.
- Roback, K., Clark, M. K., West, A. J., Zekkos, D., Li, G., Gallen, S. F., and Godt, J. W. (2018). The size, distribution, and mobility of landslides caused by the 2015 Mw7. 8 Gorkha earthquake, Nepal. *Geomorphology*, 301, 121-138. <https://doi.org/10.1016/j.geomorph.2017.01.030>.
- Stepniewski W., Sobczuk H. and Widomski M. (2011) Diffusion in Soils. In: Gliński J., Horabik J., Lipiec J. (eds) *Encyclopedia of Agrophysics*. Encyclopedia of Earth Sciences Series. Springer, Dordrecht. [https://doi.org/10.1007/978-90-481-3585-1\\_273](https://doi.org/10.1007/978-90-481-3585-1_273).
- Vargas-Alzate, Y. F., Hurtado, J. E., and Pujades, L. G. (2021). New insights into the relationship between seismic intensity measures and nonlinear structural response. *Bull Earthquake Eng.* 20, 2329–2365. <https://doi.org/10.1007/s10518-021-01283-x>.
- Wagner, T., and Pianosi, F. (2019). What has Global Sensitivity Analysis ever done for us? A systematic review to support scientific advancement and to inform policy-making in earth system modelling. *Earth-science reviews*, 194, 1-18. <https://doi.org/10.1016/j.earscirev.2019.04.006>.

# INTERNATIONAL SOCIETY FOR SOIL MECHANICS AND GEOTECHNICAL ENGINEERING

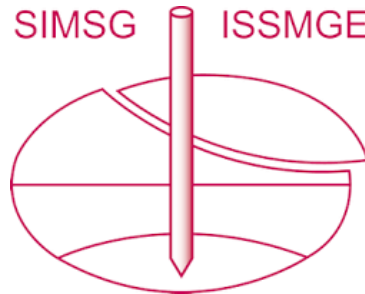

*This paper was downloaded from the Online Library of the International Society for Soil Mechanics and Geotechnical Engineering (ISSMGE). The library is available here:*

<https://www.issmge.org/publications/online-library>

*This is an open-access database that archives thousands of papers published under the Auspices of the ISSMGE and maintained by the Innovation and Development Committee of ISSMGE.*

*The paper was published in the proceedings of the 18th European Conference on Soil Mechanics and Geotechnical Engineering and was edited by Nuno Guerra. The conference was held from August 26<sup>th</sup> to August 30<sup>th</sup> 2024 in Lisbon, Portugal.*